

Servo-Adjustable Straightening Rotor

Our Accomplishments for your Benefit


- Reduction of set-up times by servo-adjustable straightening rotor
- Adjustment of straightening rotor during production via control panel (e.g. for compensating material changes or worn straightening dies)
- Maximum operating convenience: Inserting a new wire coil via advance feed function on control panel
- Straightening settings are repeatable and can be saved

Features

- 5-piece straightening rotor, servo-adjustable
- Synchronous adjustment of 3 dies, therefore ideally balanced
- Wire diameter:
4.0 mm - 10.0 mm at 400 up to approx. 800 N/mm²
5.0 mm - 9.0 mm at 400 up to approx. 1,200 N/mm²
5.5 mm - 8.0 mm from 1,200 up to 1,600 N/mm²

Example from the production

With 10 mm wire diameter and 5 minutes gain in time per coil = approximately 1 h is saved per shift

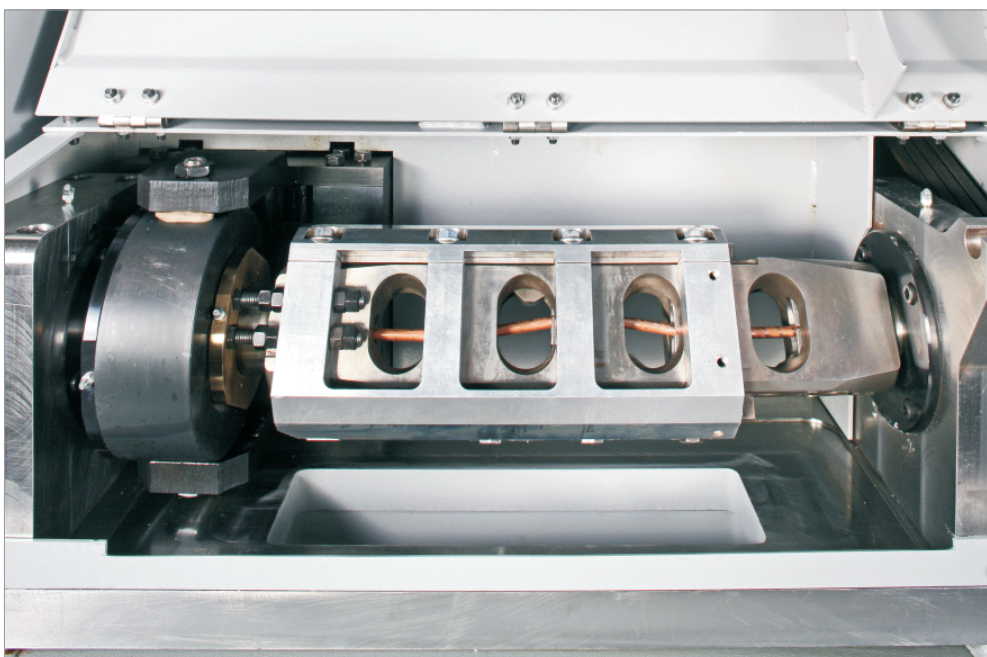

R 45

WAFIOS AG
Silberburgstraße 5
72764 Reutlingen, Germany

Phone +49 (0) 7121 146 - 0
Fax +49 (0) 7121 491209
sales@wafios.de, www.wafios.com

Precision Machinery for Wire and Tube